


GEARING

Motorized Torque-Arm

The ultimate shaft-mounted, direct-drive reducer

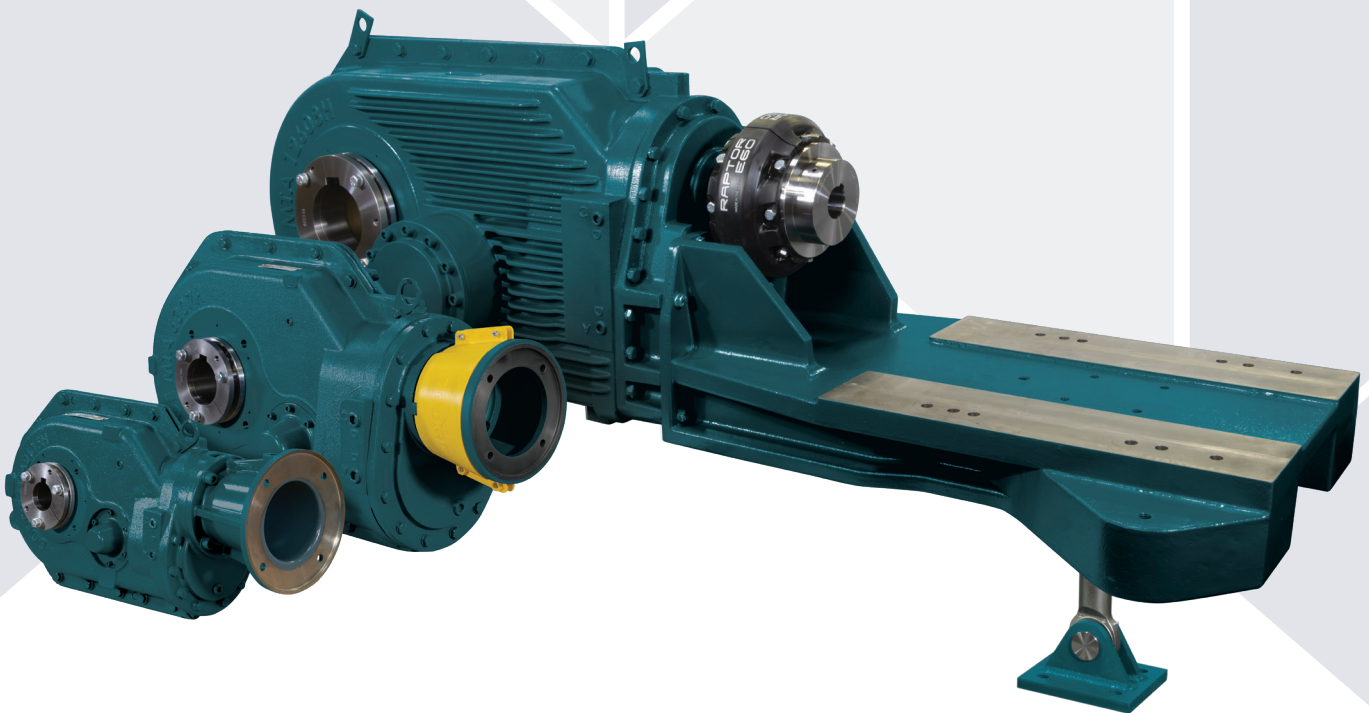

Your trusted partner

Since 1878, the rich Dodge® legacy of innovation, safety, and quality has been unmatched in the industry. We invented the shaft-mounted gear reducer with the debut of the original Torque-Arm in 1949. The revolutionary design simplified gearbox installation by eliminating the hassle of custom-fabricating base plates to align it with driven equipment.


Leveraging decades of gearing design and application expertise, the entire family of Torque-Arm gear reducers is meticulously engineered to thrive in the harshest environments with proven dependability through more than 3 million units in service worldwide—setting the standard for performance and reliability.

Direct-drive solution delivering premium performance




As part of the Torque-Arm family of gear reducers, Motorized Torque-Arm (MTA) is the rugged, direct-drive solution that provides robust performance for continuous, high-shock applications.

MTA is a right-angle reducer available in 10 sizes with multiple input options to support drive packages up to 329,000 pound-inches of torque, offering the highest torque ratings per AGMA case size in a compact power-dense design.

Packed full of industry-leading features, like its patented twin-tapered bushing system, MTA is easy to mount and dismount with heavy-duty construction for reliability that lasts for less required maintenance—maximizing uptime and lowering your total cost of ownership.

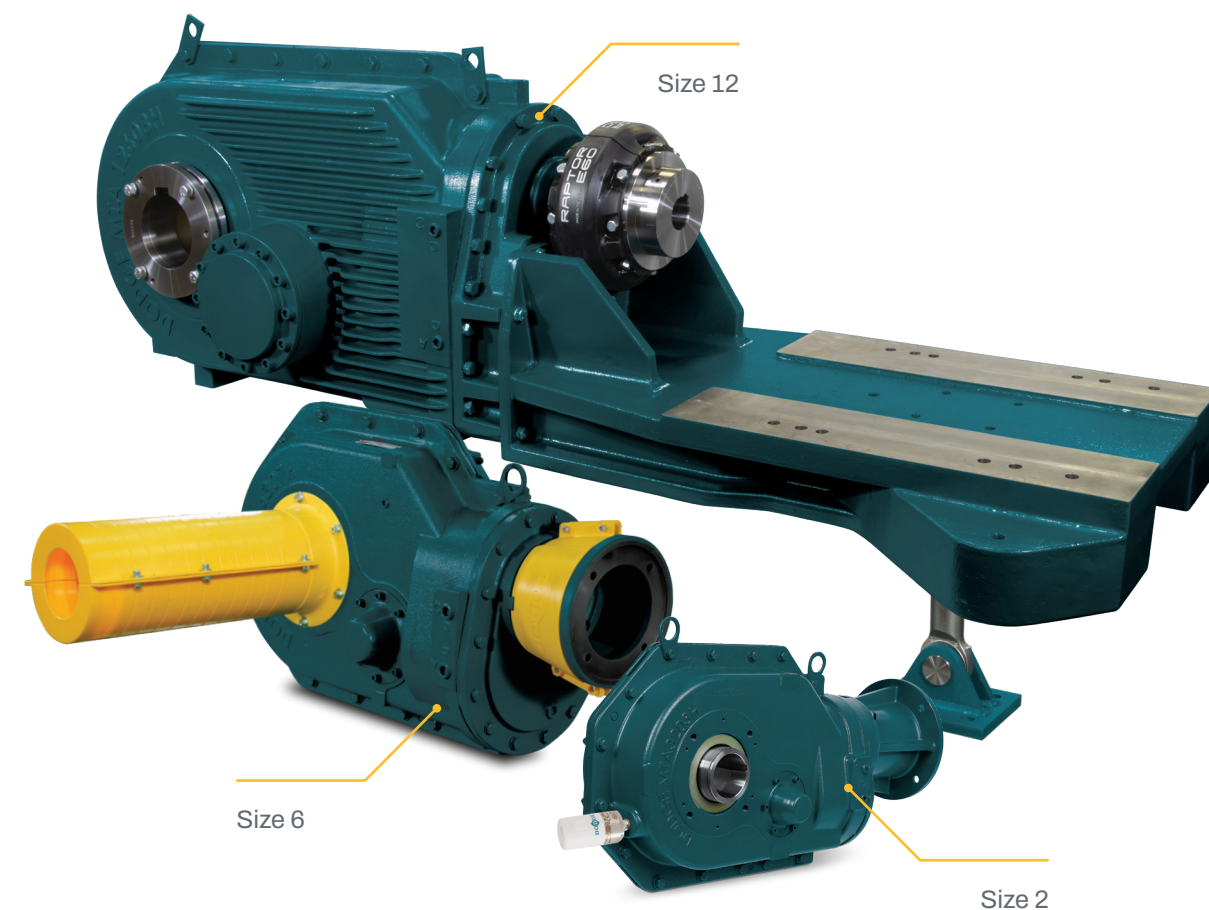

Features engineered for maximum durability

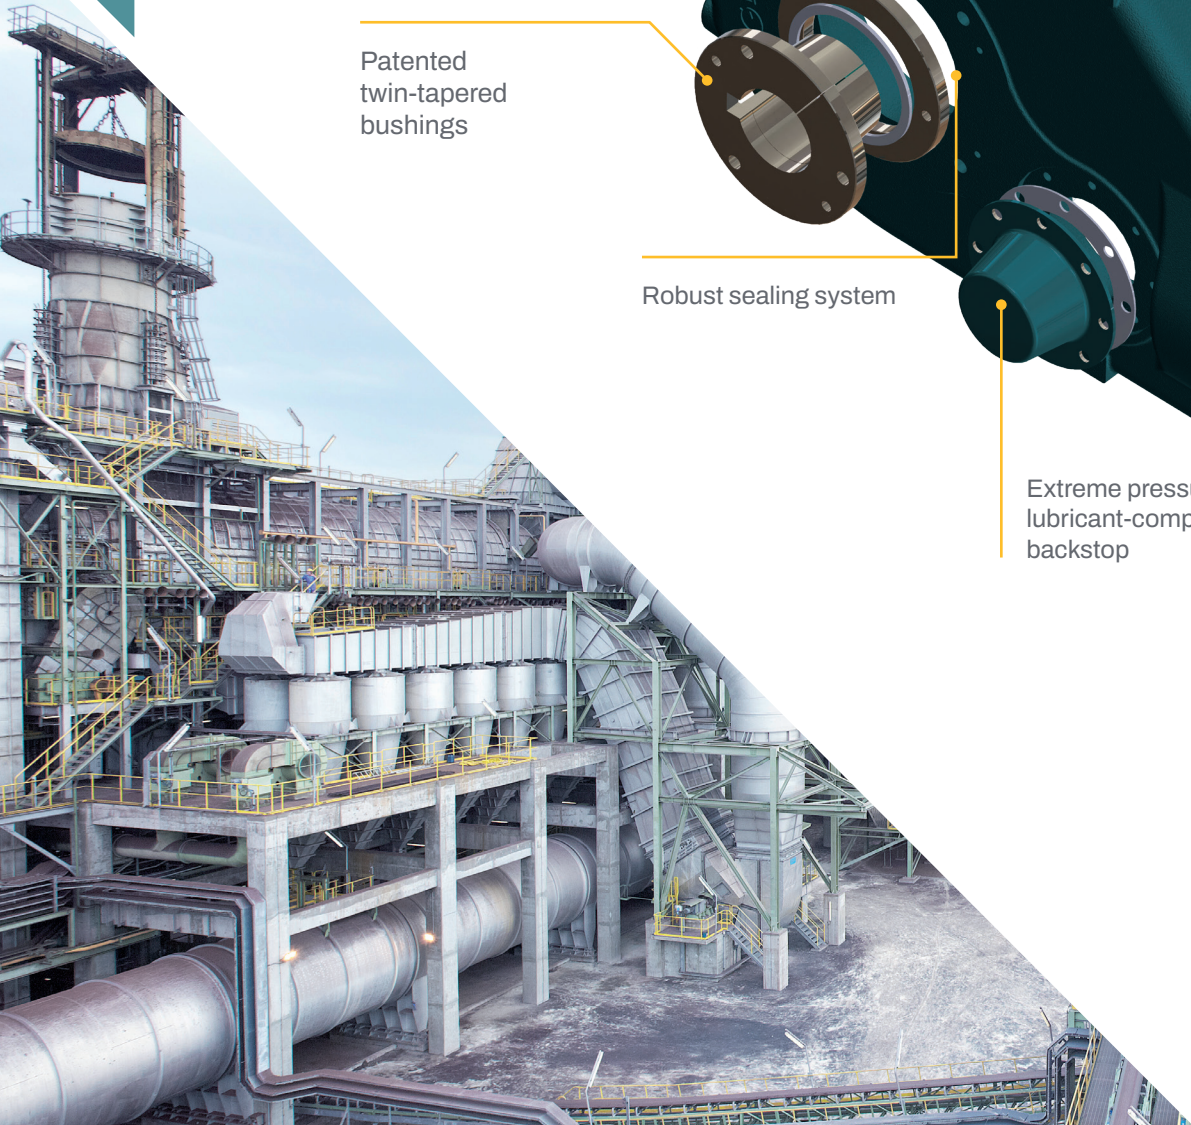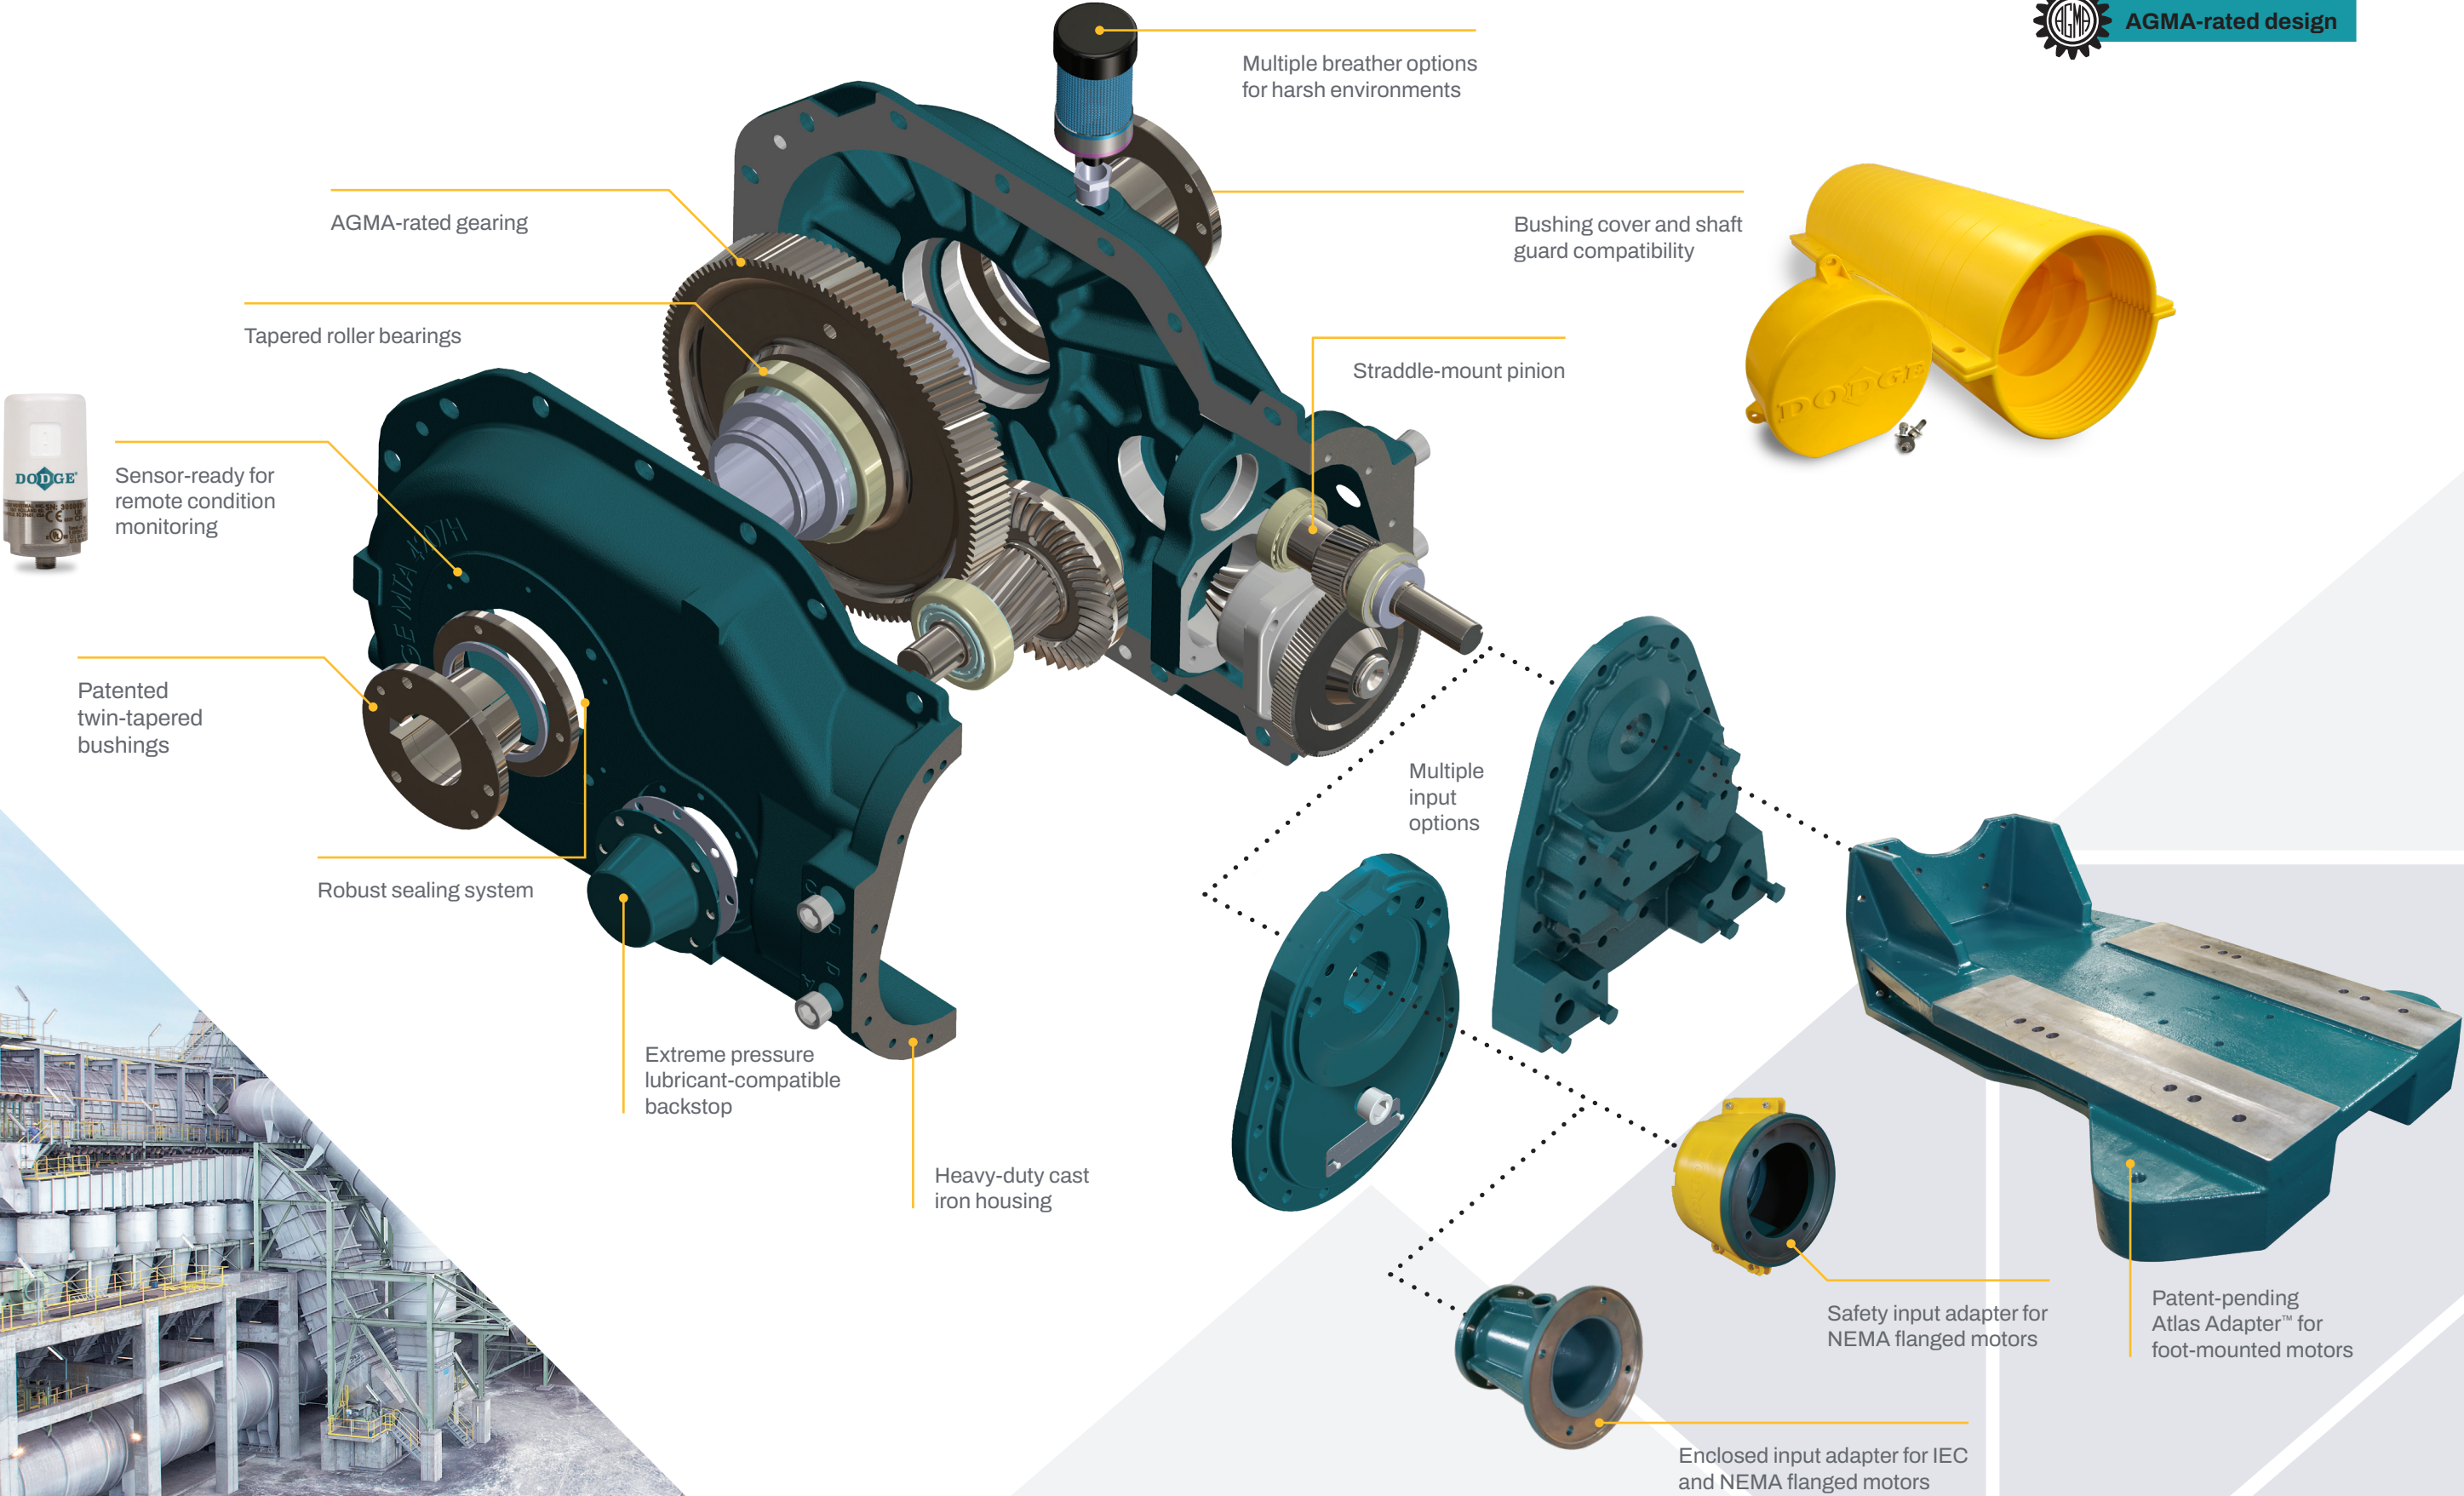


Multiple input options for application versatility

MTA, the reliable shaft-mount reducer, is available with multiple input options that fit a variety of motor styles and sizes to be the go-to solution in applications throughout your operation.

Options for flanged motors

MTA assemblies are offered with a safety input adapter or enclosed input adapter option that are compatible with IEC and NEMA flanged motors.

- Available for reducer sizes 2 to 12
- Support for drive packages up to 100 horsepower (75 kilowatts)
- Fan available for reducer sizes 7 to 12 with NEMA C-face motors

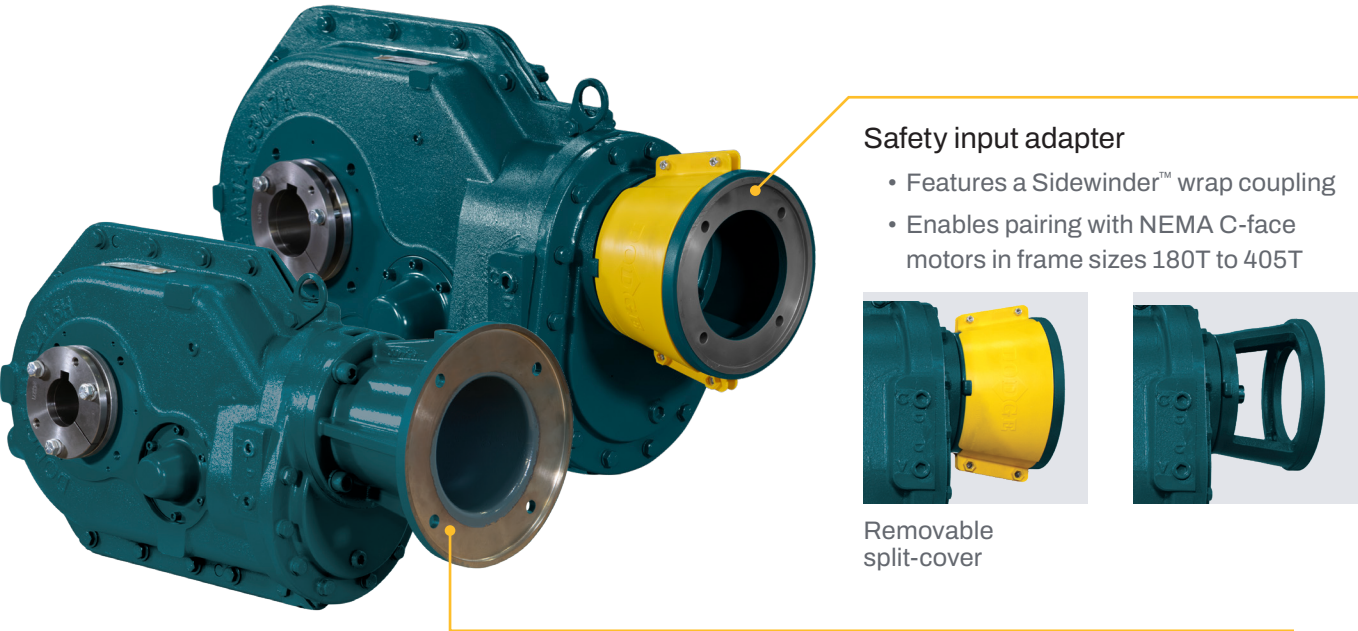


- Enclosed input adapter**
- Features a three-piece jaw coupling
 - Enables pairing with NEMA C-Face motors in frame sizes 56 to 140 or IEC flanged motors in frame sizes 90 to 250

Options for foot-mounted motors


Built on its proven success, the MTA reducer offering has been expanded to include assembly packages with reducers sizes 7 through 12 featuring a patent-pending Atlas Adapter that supports large-frame foot-mounted motors.

The enhanced reducer capability enables pairing large, readily available foot-mounted motors to be a cost-effective solution to easily tackle demanding operations with high horsepower requirements.

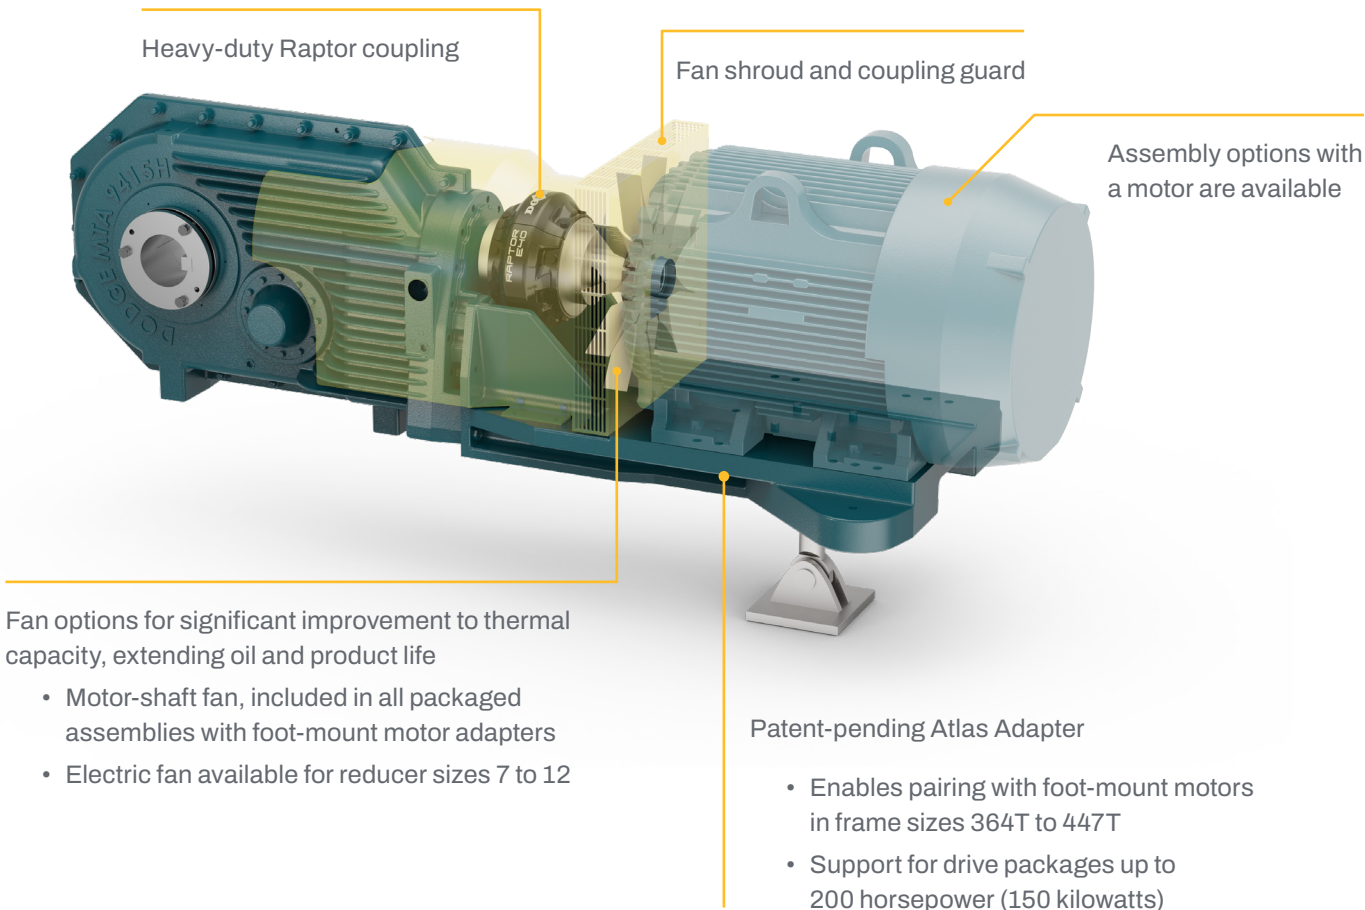


Mounting configurations

Sizes 2 through 8 with tie rod




Sizes 9 through 12 with heim-joint torque arm reaction beam




Mounting configurations

Sizes 7 and 8 with tie rod



Sizes 9 through 12 with heim-joint torque arm

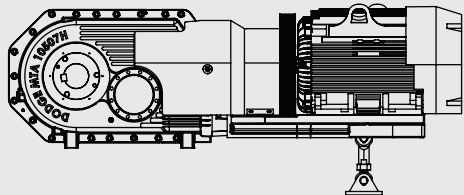



AGMA-rated design

As an American Gear Manufacturers Association (AGMA) rated direct-drive reducer, MTA is engineered to the highest standards and provides the longest product life possible—outlasting the competition that uses Deutsches Institut für Normung (DIN), a European standards platform, design specifications.

We don't cut corners with our products, and MTA is the perfect example of that philosophy. Extensively tested at our Innovation Center and proven in the field for over 20 years, MTA incorporates heavy-duty components to maximize uptime in the most demanding conditions.


- Tapered roller bearings used throughout, unlike ball bearings used in DIN-rated competitive reducers, for best-in-class L_{10} and L_{50} life
- Built with case-carburized, helical-bevel gearing for dependable performance and long-lasting reliability

Average reducer life

Designed to AGMA standards for 5,000-hour unadjusted L_{10} bearing life, MTA provides a significantly longer average reducer life* than DIN-rated reducers.

- 2.00 times longer life than reducers designed to DIN 2,500-hour specifications
- 2.78 times longer life than reducers designed to DIN 1,800-hour specifications

* Calculated using bearing L_{50} life, also known as average bearing life

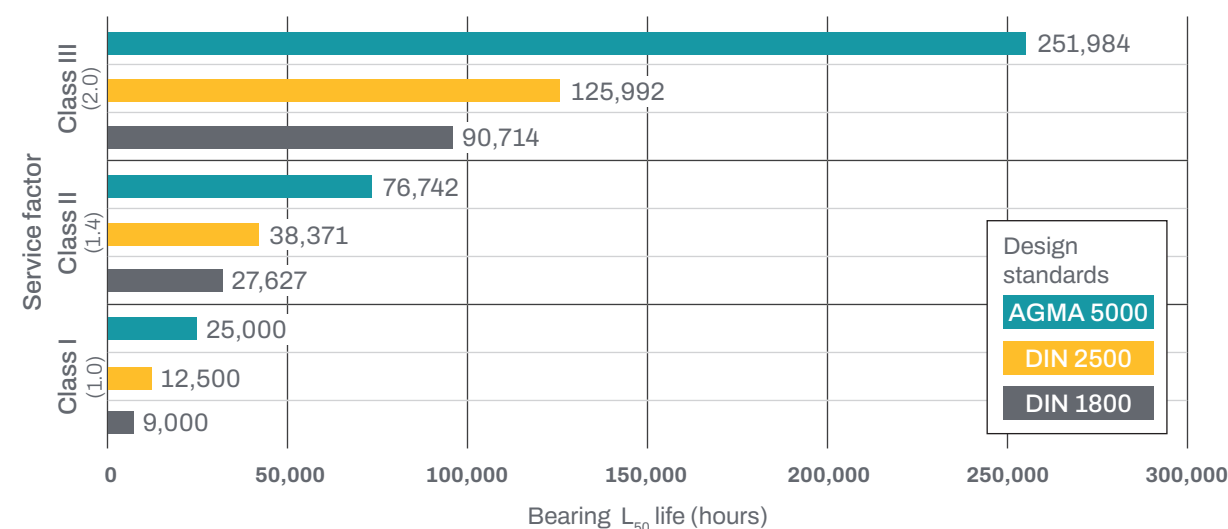

Power-dense platform

When compared to competitive options, MTA is both smaller and lighter—offering equivalent torque capabilities in a more compact footprint. This minimizes the overhung load and, as a result, potentially allows for reducing the size of the supporting driven equipment for lower associated component costs.



Premier performance and reliability

Twin-tapered bushing system

A standard feature on MTA and trusted for over 50 years in our Torque-Arm gearboxes, our patented twin-tapered bushing system is designed with two fully split, eight-degree taper bushings. It offers easy installation using only common hand tools and guaranteed gearbox removal without requiring cutting the reducer off the shaft—improving reliability, enhancing on-site safety, and maximizing uptime.

- Simplifies installation and removal
- Mitigates shaft-to-reducer fretting
- Eliminates eccentricity and wobble
- Available in standard and short-shaft versions
- Available in inch and metric bores
- Increased bore capability in many sizes
- Shaft-ready out of the box
- Lowers total cost of ownership



Extreme pressure lubricant-compatible backstop


The only shaft-mount reducer with a backstop designed to operate with extreme pressure (EP) lubricant for minimizing internal component wear. Engineered to prevent reverse rotation for enhanced on-site safety, its lift-off sprag design is optimized for wear-free operation to provide long-lasting reliability, safety, and performance.

Harsh-duty sealing system

Patented, advanced sealing system featuring a durable Hydrogenated Nitrile Butadiene Rubber (HNBR) oil seal protected by a metal excluder seal with rubbing lip for long-lasting performance in extreme environments with high contamination levels.

HNBR material

- Extends seal service life, up to six times the life of standard Nitrile Butadiene Rubber (NBR) seals
- Withstands a wider range of operating temperatures than NBR and Viton seals, from -40 °F to 300 °F (-40 °C to 150 °C)
- Improves chemical and ozone resistance over NBR seals
- Increases tensile strength over NBR seals for greater flexibility and durability

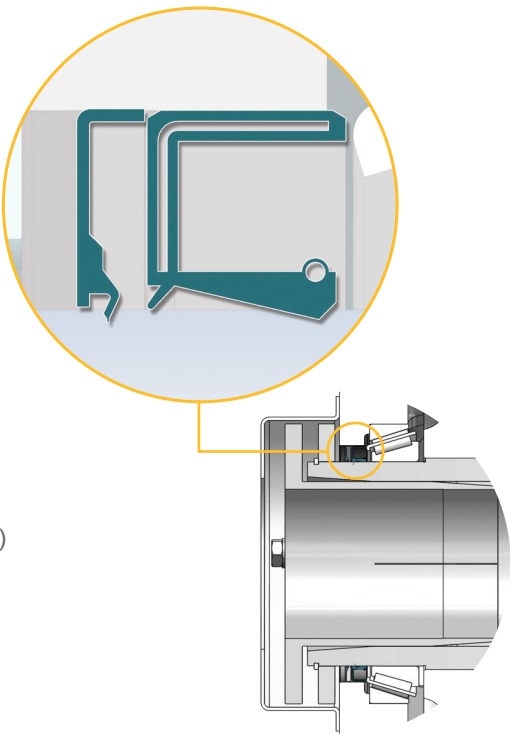

Tie rod kit

Ruggedly constructed, the tie rod kit is engineered to keep a reducer stable and level, opposing reaction forces in a running gearbox to maximize application reliability. The kit includes standard brackets and offers universal mounting options for shaft-mount configurations for MTA up to size 8.



Breather options


Multiple styles of breathers are available and can be easily installed on MTA—from standard-filter to fully-enclosed to Hydra-Lock desiccant breathers—to provide defense against moisture and particulate contamination for dependable, worry-free operation.

Drive options

Screw conveyor drive


MTA can be easily implemented into screw conveyor applications to provide proven dependability in a compact, direct-drive design. The CEMA bolt-on screw conveyor adapter features double-lip seals on both surfaces for optimized sealing and an open center for allowing contaminants to drop out.

Pairing seamlessly with the adapter, screw conveyor drive shafts are engineered to match CEMA dimensions and are made from high-alloy or stainless steel for durability. The three-bolt drilled design with a tapered fit ensures easy installation and patent-pending lock plate provides mechanical shaft removal.

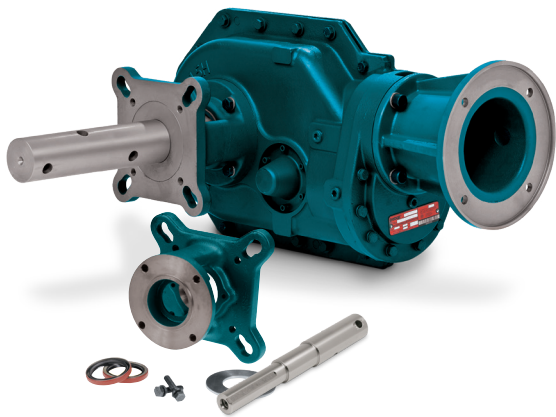

Hydraulic drive

Available as an assembly with a preselected hydraulic motor connected to a gearbox and adapter, Hydraulic MTA comes ready to install and increases the capacity of your portable hydraulically powered conveying equipment. Its compact, right-angle design allows for the use of a wider conveyor belt to transport more material while maintaining the overall space constraints that typically limit the size of conveying equipment.

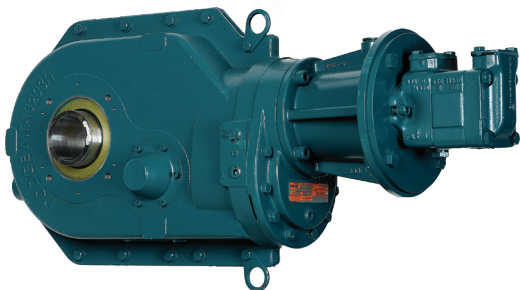


* User-supplied hydraulic motor


Reliability kits

When an application is critical to operational success, a reliability kit creates a closed-loop system for MTA to eliminate the introduction of outside air or contaminants—maximizing gearbox performance and uptime.

Position C

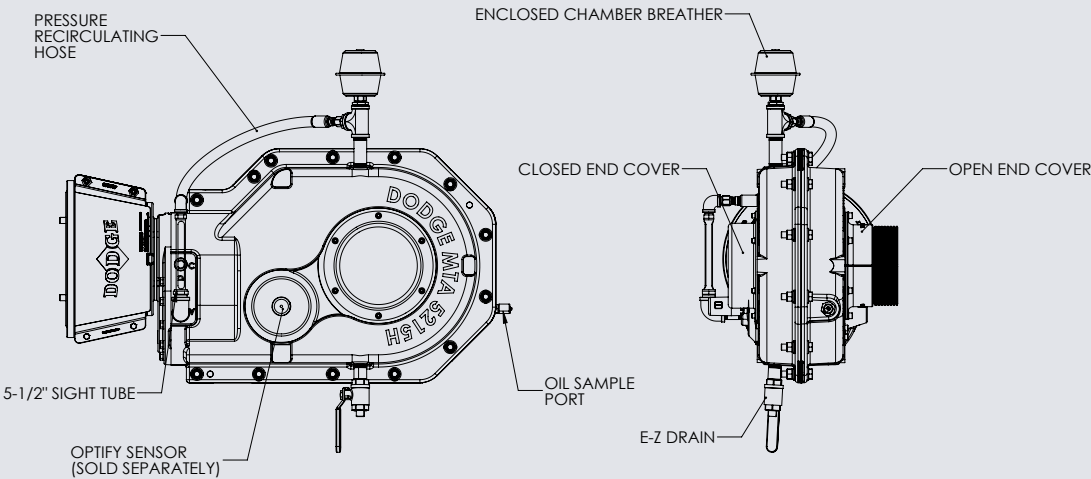

Position D

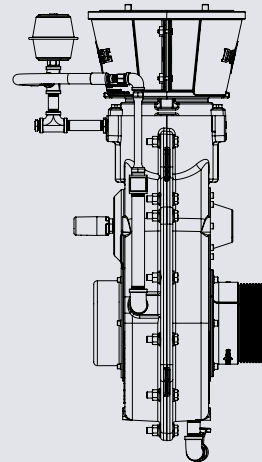

Safety, more than an accessory

The safest product is one designed to operate reliably with little to no human interaction.

Since the greatest risk of injury occurs when interacting with a product, our approach to safety starts with products designed to provide you with highly reliable solutions with minimal maintenance.


When extra protection is needed, easy-to-install guards are available to keep your employees safe from rotating equipment while accommodating OSHA and MSHA guidelines.

Bushing covers

Ready-to-install covers can be attached to the pre-drilled and tapped gearcase without any modification to shield workers from rotating equipment, block contamination, and protect seals—increasing safety and extending product life.

Shaft guards

Designed for safety, shaft guards can be easily installed with basic hand tools. The length can be easily customized to fit a variety of applications, helping to eliminate injuries and reduce on-site risks.

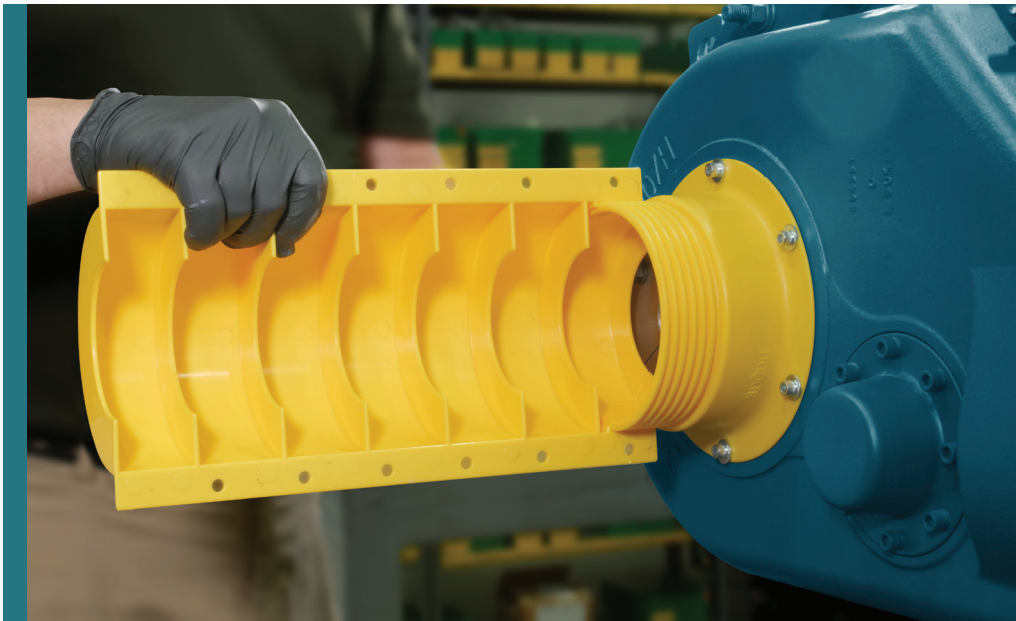

Unmatched availability

Whether you design new equipment or rely on gear reducers for critical applications, MTA is assembled with stock components to be available in days—offering significantly faster lead times than competitive options that take weeks or months to be assembled and shipped.

In addition to its unparalleled lead times, MTA with every input option and the most common reducer case sizes and ratios is available off the shelf to support virtually any application from stock.



Manufactured in the USA


With world-class quality in our ISO 9001:2015-certified facility in Greenville, SC, every single MTA gearbox is spin and leak tested before going out the door to ensure long-lasting performance and provide you with peace of mind.

PT Wizard

Gearbox selection made easy, like magic

Save time and money with the power of PT Wizard, the easy-to-use Dodge product selection program. PT Wizard features individual product selection, competitive interchanges, and tools for application-based complete system design.

Leveraging our decades of gearbox engineering expertise, PT Wizard's product selection tool empowers you to choose the best MTA solution with corresponding accessories based on your application requirements.

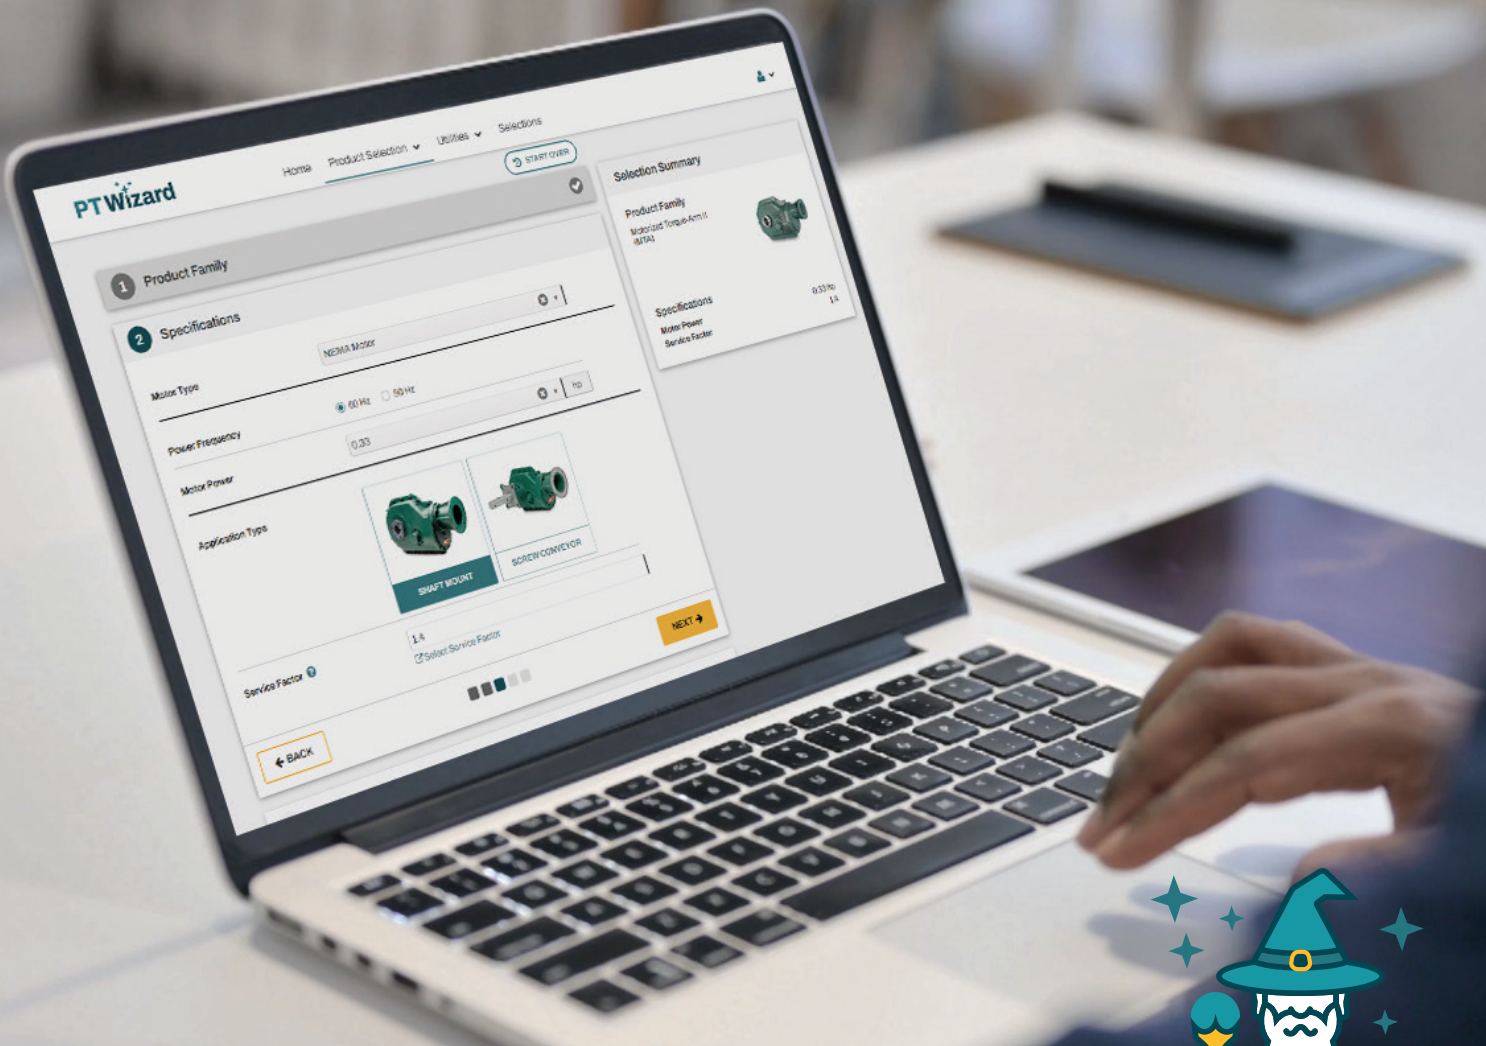

Find your reducer solution today at ptwizard.com



Real-time insight to help you work smarter, not harder

OPTIFY™, the Dodge portfolio of Industrial Internet of Things (IIoT) solutions, allows you to easily monitor the overall health of your power transmission equipment with sensors installed on equipment—letting you gain powerful insight to reduce unplanned downtime, improve reliability, operate safely, and make better-informed decisions in real-time.

Platform

Take the guesswork out of work with the free OPTIFY condition monitoring platform that empowers you with overall health indicators of your assets anytime, anywhere through its web portal or mobile app—providing you with a continuous flow of data for safe, hands-free gathering of measurements.



Performance Sensor

Built on the proven success of Dodge sensors, the specialized wireless sensor remotely captures accurate temperature, vibration, and speed measurements in your mounted bearings, gear reducers, and motors for complete powertrain condition monitoring.



Breather

The connected breather solution engineered to eliminate gearbox contamination, allowing you to tap into the power of the OPTIFY platform to remotely monitor breather health—enhancing gearbox reliability and simplifying on-site maintenance.



Scan to access OPTIFY or visit dodgeoptify.com



The OPTIFY app is available at:





Dodge Industrial, Inc.

1061 Holland Road, Simpsonville, SC 29681

+1 864 297 4800

dodgeindustrial.com

Dodge Industrial, Inc. reserves all rights in this document and in the subject matter and illustrations contained therein. We reserve the right to modify contents without prior notice and do not accept responsibility for potential errors or possible lack of information in this document. Dodge Industrial, Inc. Terms and Conditions apply. Any reproduction, disclosure to third parties or utilization of its contents—in whole or in parts—is forbidden without prior written consent of Dodge Industrial, Inc.